


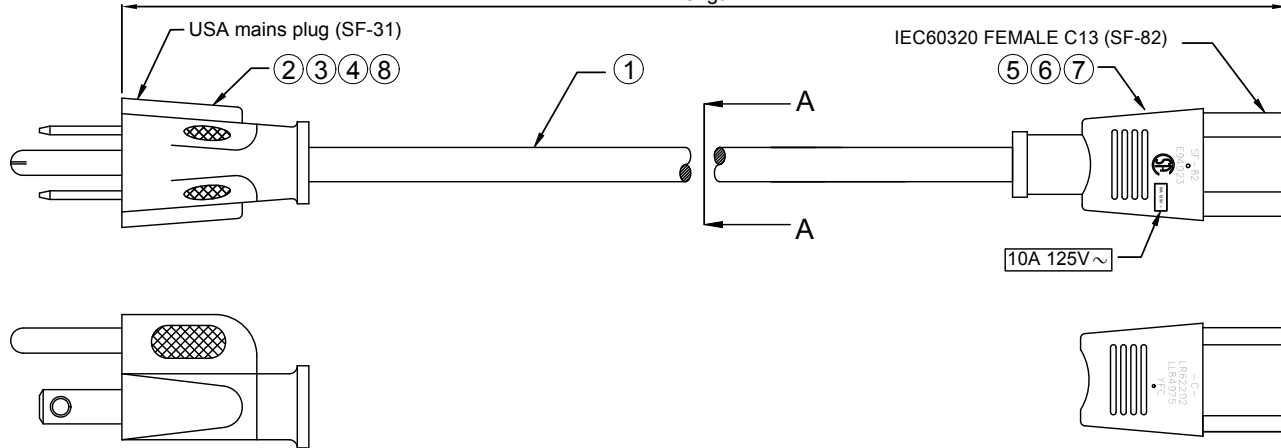



MOLDING: SF-31
SF-82

DATE	REV.	REVISION	DRAFTING	CHECKED
2020/11/6	A/0	Initial	黃潤先	
2021/05/26	A/1	Add RAL NO.	Carrie	



B
2:1

WIRE MARKING(NO.05):(UL) E135710-F3 SJT 3X18AWG 60°C 300V VW-1 CSA
LL95737 SJT 3X0.824mm²(18AWG) 60°C 300V FT2

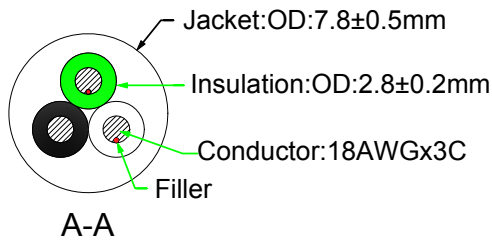

Item	Color	RAL NO. (similar to)	Length
AK5443	Black	RAL9011	1000±20
AK5444	Black	RAL9011	1800±20
AK5062	Black	RAL9011	2500±30

PINOUT		
SF-31	WIRE	SF-82
E	GREEN	E
L	BLACK	L
N	WHITE	N

Polarity and Conduction and Penetration Test	
Dielectric Voltage Withstand Test : 1500V / 1 Sec	
Electrical Performance (20°C)	
Item	Parameter
Conductor Resistance	≤ 22.8Ω/1000m
Voltage Rating	AC 300V

⑧	Molding	Black 40P PVC	AR
⑦	Molding	Black 50P PVC	AR
⑥	Inner frame	IEC C13 three PIN(SF82)inner frame , Black	1PC
⑤	Terminal	IEC C13 female,Matching 20-16AWG wire	3PCS
④	Inner frame	5-15P three PIN 90° inner frame,Black PC material.	1PC
③	Terminal	American standard 6.3 single sheet of non-polar,carrying-current terminal,matching 18-16# wire plated nickel.	2PCS
②	Terminal	American standard 4.75 round tube ground wire male terminal,matching 18-16AWG wire,plated nickel	1PC
①	CABLE	SJT 18AWGx3C 60°C PVC Black	AR

Unless specified on the drawing, tolerances are per the follows:

X.	±0.20	X°	±3
.X	±0.10	.X°	±0.3
.XX	±0.05		



DRAW. NO	YFAC-S200034	TITLE	SJT 18AWGx3C 60°C SF-31 TO SF-82 Black CABLE ASS'Y		
CUSTOMER	ACT	DRAW	Carrie	DATE	2021.05.26
CUST' R P/N	--	CHECK		DATE	
SCALE	NONE	APPROVED		SHEET	1 of 1

No.	TITLE	DESCRIPTION	Q'TY
Cable Spec NO.	/	Part Number	--

Note: RoHS2.0 Reach GP HF Other

